




BE Series

Spin-On Filter Elements

Used with BF Filter Heads

Diameter: 3.1"
Mounting Thread: 3/4"-16 UN
Overall Height: 3.4"
Operating Pressure: 200 PSI Max. Operating
ΔP max: 50 psid
Temperature: Up to +250°F Operating
Applications: Petroleum based fluids

Part Number	Nominal Rating $\beta_{x\mu(c)} = 2$ (50% Efficiency)	Absolute Rating $\beta_{x\mu(c)} = 75$ (98.7% Efficiency)	Can Color/ Imprint	Media Type	Internal Bypass
BE100 "10 Micron"	8	23	White/Red	Cellulose	None
BE1018 "10 Micron"	8	23	White/Red	Cellulose	18 psid
BE2510 "25 Micron"	11	27	White/Black	Cellulose	10 psid
BE2525 "25 Micron"	11	27	White/Black	Cellulose	25 psid
BE400 "40 Micron"	40	-	White/Black	Cellulose	None

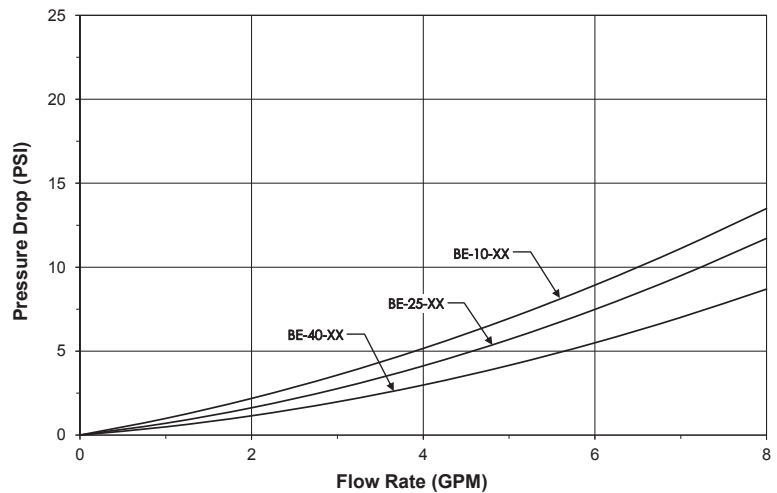

**Average Pressure Drop Through Clean Filter Assembly
With 150 SUS Oil At 105° F.**

Application Data:

Reference:

$\beta_{x\mu(c)} = 2$ represents 50% efficiency at particle size "x" micron (Nominal Rating)

$\beta_{x\mu(c)} = 75$ represents 98.7% efficiency at particle size "x" micron (Absolute Rating)

Application: Petroleum based fluids. Consult factory for synthetic fluids.

Caution: Do **not** use BE Series filter elements on internal combustion engines.