


# G SERIES ELEMENTS

## PALL 9020/9021 INTERCHANGE



Media: Zinga Synthetic Z-Glass Media  
 Application: P3000 Series Pressure Filters  
 Temperature: Nitrile Seals -45°F to +225°F  
 Fluorocarbon Seals -20°F to +275°F

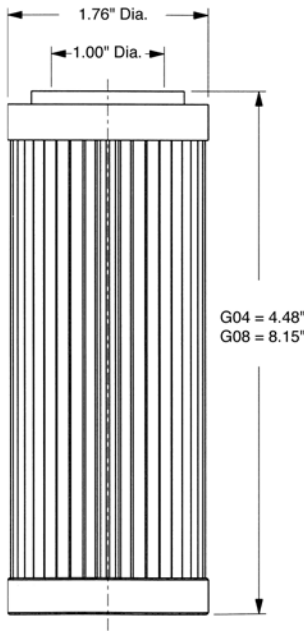

**150 PSID RATED ELEMENTS**  
(For Use in Filters with By-pass Valve Only)

ZINGA P/N	BXμ(c) = 200	BXμ(c) = 1000	PALL P/N
G0403LN	<4 Micron	<4 Micron	HC9024FDP4H
G0406LN	5 Micron	6 Micron	HC9024FDN4H
G0410LN	8 Micron	10 Micron	HC9024FDS4H
G0420LN	19 Micron	23 Micron	HC9024FDT4H
G0803LN	<4 Micron	<4 Micron	HC9024FDP8H
G0806LN	5 Micron	6 Micron	HC9024FDN8H
G0810LN	8 Micron	10 Micron	HC9024FDS8H
G0820LN	19 Micron	23 Micron	HC9024FDT4H



Buna-N Seals Standard. Replace "N" in P/N with "V" for Fluorocarbon.

**3000 PSID RATED ELEMENTS**

ZINGA P/N	BXμ(c) = 200	BXμ(c) = 1000	PALL P/N
G0403HN	<4 Micron	<4 Micron	HC9021FUP4H
G0410HN	8 Micron	10 Micron	HC9021FUS4H
G0803HN	<4 Micron	<4 Micron	HC9021FUP8H
G0810HN	8 Micron	10 Micron	HC9021FUS8H

Buna-N Seals Standard. Replace "N" in P/N with "V" for Fluorocarbon.

**Average Pressure Drop Through Clean Element  
With 150 SUS Oil At 100° F (32 cSt at 40° C)**

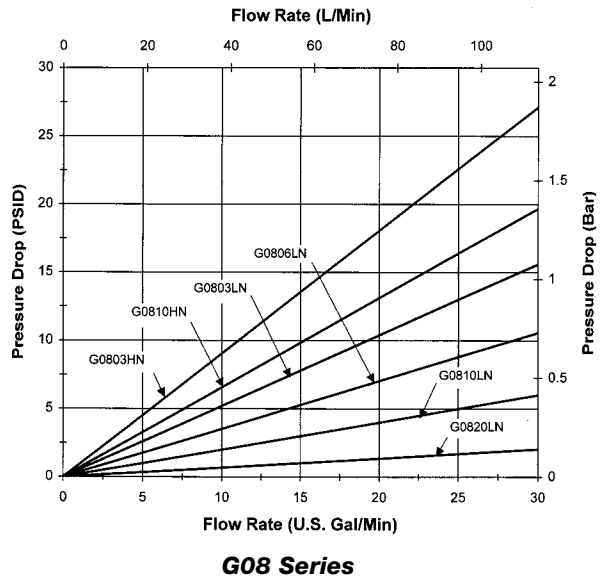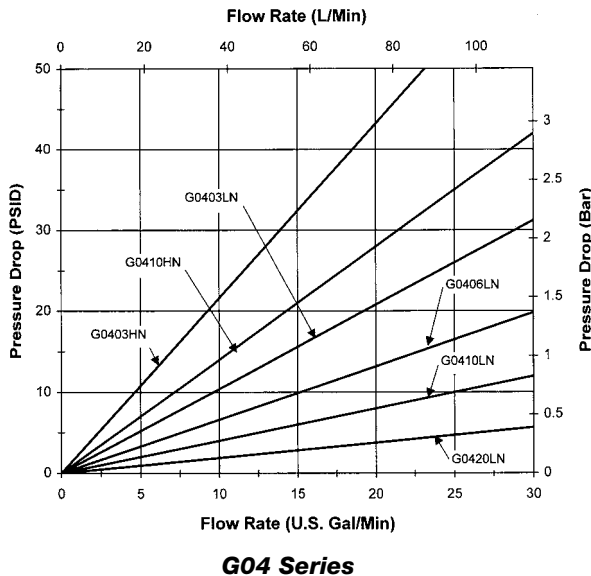

**Consult Manufacturer for Ordering Information**

