



W SERIES ELEMENTS


PALL 9600/9601 INTERCHANGE

Media: Zinga Synthetic Z-Glass Media
 $B_x > 200$ Absolute Filtration

Application: W1200 & W6 Series Pressure Filters

Temperature: Nitrile Seals -45F to +225F
 Fluorocarbon Seals -20F to +275F

PRESSURE FILTERS

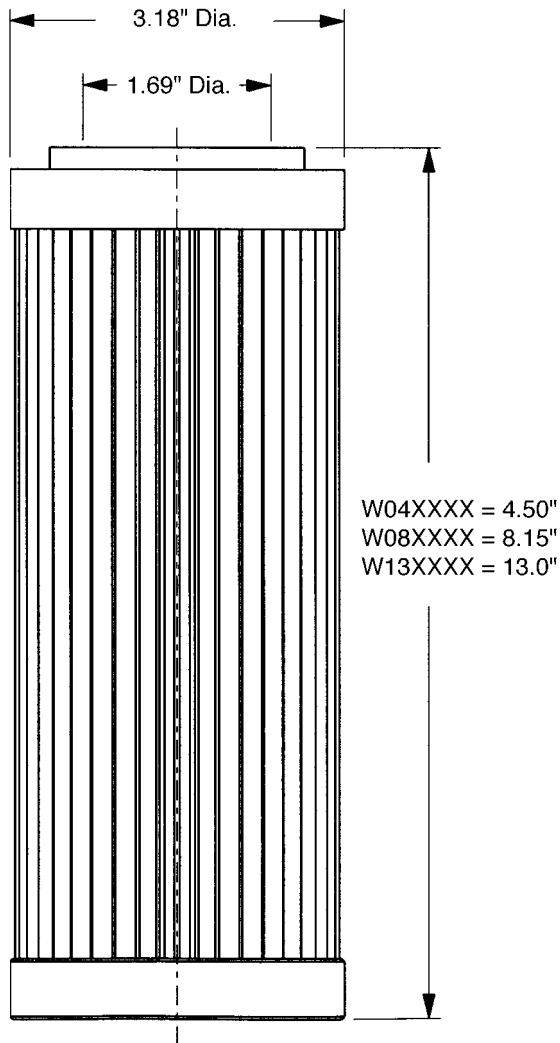

150 PSID RATED ELEMENTS

(For Use in Filters with By-Pass Valve Only)

ZINGA P/N	$B_x > 200$	PALL P/N
W0403LN	3 Micron	HC9600FDP4H
W0406LN	6 Micron	HC9600FDN4H
W0410LN	10 Micron	HC9600FDS4H
W0420LN	20 Micron	HC9600FDT4H
W0803LN	3 Micron	HC9600FDP8H
W0806LN	6 Micron	HC9600FDN8H
W0810LN	10 Micron	HC9600FDS8H
W0820LN	20 Micron	HC9600FDT8H
W1303LN	3 Micron	HC9600FDP13H
W1306LN	6 Micron	HC9600FDN13H
W1310LN	10 Micron	HC9600FDS13H
W1320LN	20 Micron	HC9600FDT13H
W1603LN	3 Micron	HC9600FDP16H
W1606LN	6 Micron	HC9600FDN16H
W1610LN	10 Micron	HC9600FDS16H
W1620LN	20 Micron	HC9600FDT16H

Buna-N Seals Standard. Replace "N" in P/N with "V" for Fluorocarbon.


3000 PSID RATED ELEMENTS

ZINGA P/N	$B_x > 200$	PALL P/N
W0403HN	3 Micron	HC9601FUP4H
W0410HN	10 Micron	HC9601FUT4H
W0803HN	3 Micron	HC9601FUP8H
W0810HN	10 Micron	HC9601FUT8H
W1303HN	3 Micron	HC9601FUP13H
W1310HN	10 Micron	HC9601FUT13H
W1603HN	3 Micron	HC9601FUP16H
W1610HN	10 Micron	HC9601FUT16H


Buna-N Seals Standard. Replace "N" in P/N with "V" for Fluorocarbon.

W SERIES ELEMENTS


Average Pressure Drop Through Clean Element
With 150 SUS Oil At 100° F (32 cSt at 40° C)

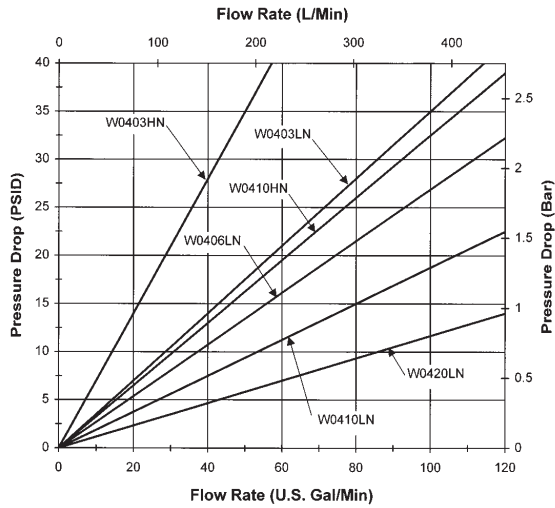


W04 Series

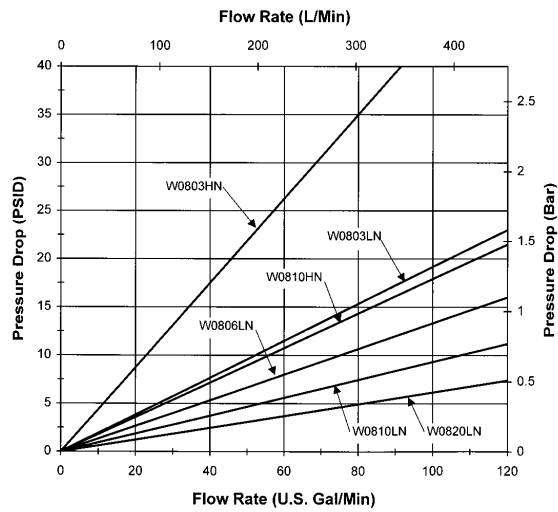

W08 Series

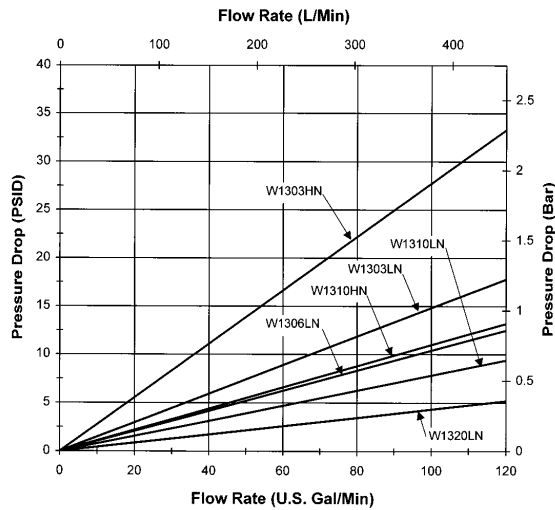

W13 Series

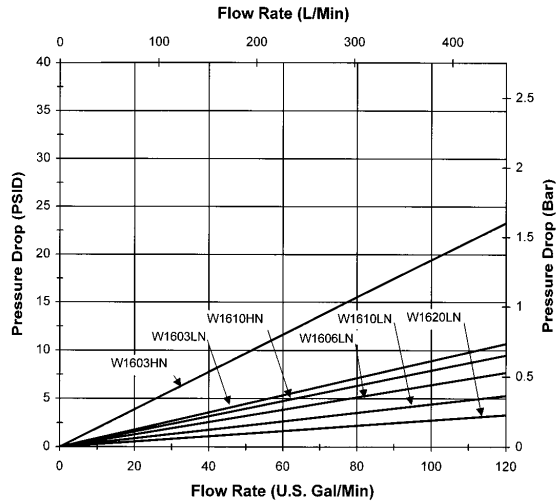

W16 Series

PRESSURE FILTERS