



INDUSTRIAL FLUID POWER COMPONENTS
AND SYSTEMS



C20 SERIES

Steel Check Valves

C20-8FP-7



C20-12FP-7



Specifications

1. 3/8" thru 2" NPT or SAE ports
2. 3000 psi (210 Bar) maximum pressure
3. 7 psi cracking pressure standard
4. 70 psi cracking pressure available 1" thru 2"
5. Recommended for petroleum based fluids- ISO VG32-68
6. Recommended filtration- 10 micron
7. Cold starts: 250 SUS maximum viscosity
8. **Maximum Temperature:** 180°F, (82.2°C) or at minimum fluid viscosity of 80 SUS




C20-8FP-7



C20-12FP-7

Dimensional Data

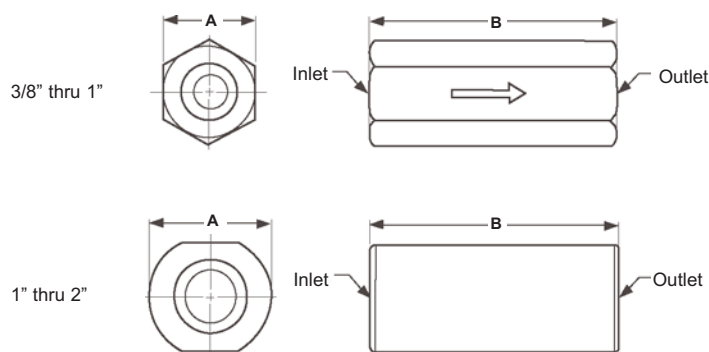

Size	A	B	Weight
3/8"	1	2.76	.66
1/2"	1.14	3.23	1.1
3/4"	1.75	3.60	1.8
1"	2.01	4.41	2.2
1" (C20L)	2.01	5.41	2.7
1-1/4"	2.28	5.20	4.7
1-1/2"	2.52	5.51	7.2
2"	3.15	6.14	11.0

Units: Inches/ lbs

Ordering Information

C20 - 12FP - FP - 7

Style	Size	Connection	Function
C20 = Standard	6 = 3/8"	FP = Female Pipe	omit = Not Applicable
C20L = 1" extra nose length for up stream tapping	8 = 1/2"	FS = Female SAE	7 = 7 psi cracking
C20LL = 1" extra nose length for up stream plus 1" extra butt length for down stream tapping	12 = 3/4"		70 = 70 psi cracking (@1 gpm)
	16 = 1"		
	20 = 1-1/4"		
	24 = 1-1/2"		
	32 = 2"		

Only size 16 available code L at this time.
Size 20 also available soon.