

ΔP-Q HOUSING CURVES BASED ON ISO 3968


The housing curves apply to mineral oil with a density of 0.86 kg/dm³ and a kinematic viscosity of 30 mm²/s.
In this case, the differential pressure changes proportionally to the density.

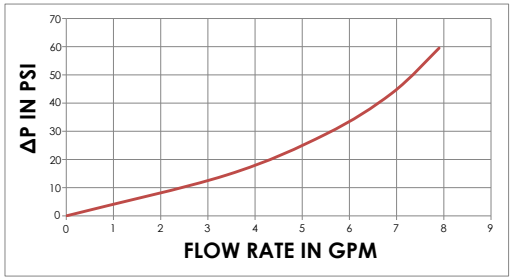


ΔP-Q filter Element

The gradient coefficients in PSI/(GPM) apply to mineral oils with a kinematic viscosity of 30 mm²/s. The pressure drop changes proportionally to the change in viscosity.

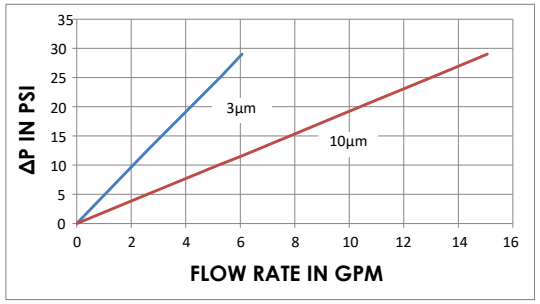

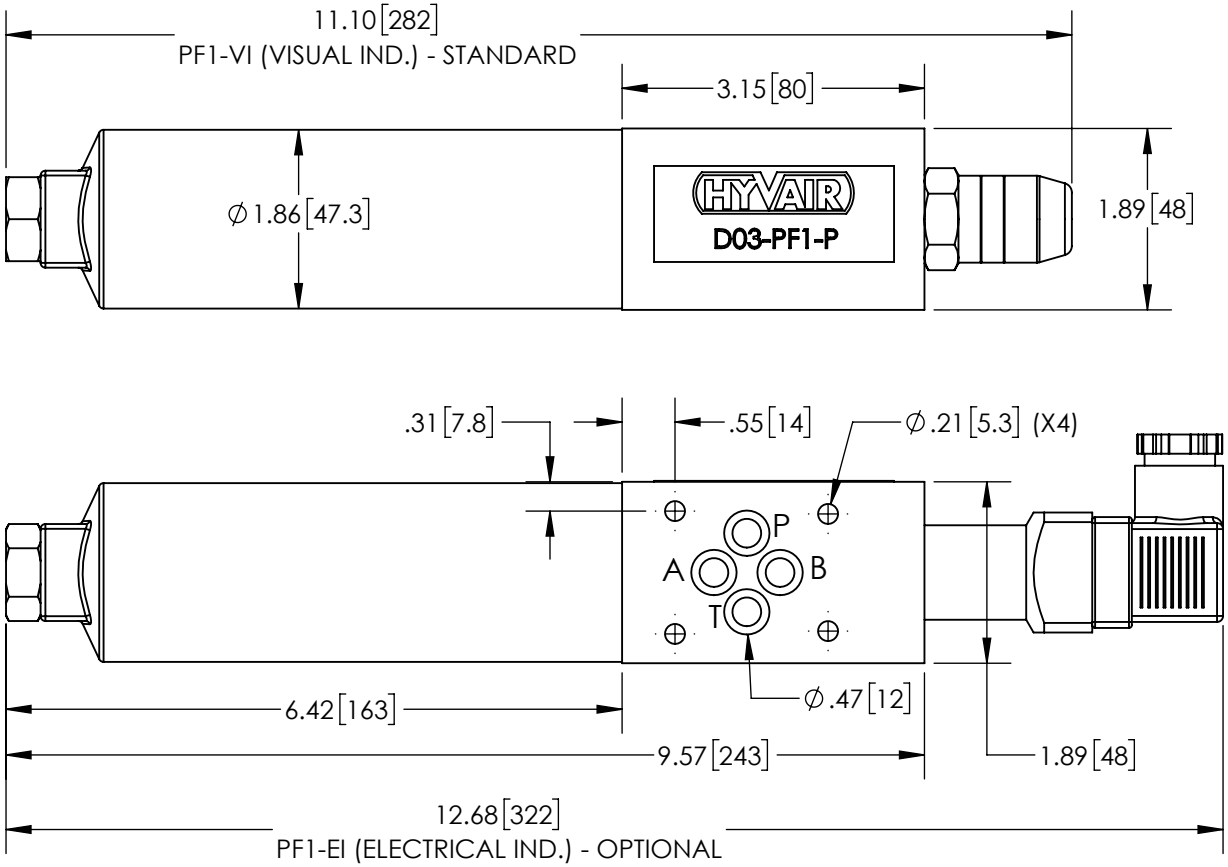

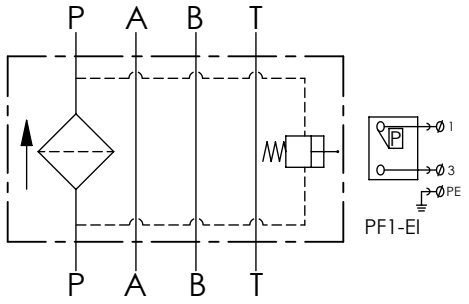

BOLTS

SHCS 10-24 x 3.75"
w/ Hi Collar Lock Washers
(1) Solenoid Valve

OPTIONAL COMPONENTS

INDICATORS
ELECTRICAL: PF1-EVI
VISUAL: PF1-VI (STANDARD)

REPLACEMENT ELEMENTS
3 MICRON: D03-PFE-3
10 MICRON: D03-PFE-1 (STANDARD)

DETAIL FOR P/N:
D03-PF1-P

HYVAIR
31341 Friendship Dr.
Magnolia, TX 77355
P: (281) 259-7768
F: (281) 259-7249
sales@hyvair.com

SCALE: 1:2 | UNITS: INCH [mm]