


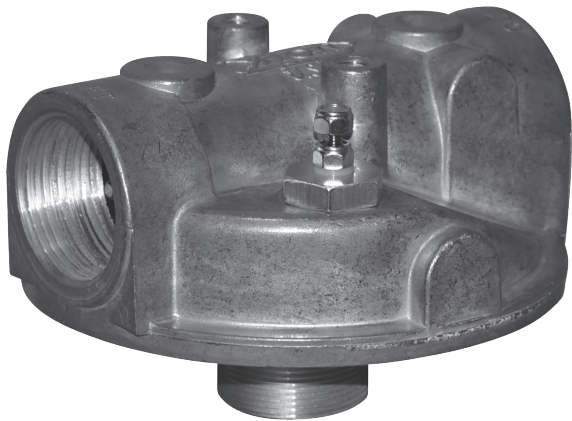



SF122 Series

Spin-On Filter Heads

with ΔP Indicator Option

Used with SE, LE, ZSE & ZLE Filter Elements

- Flows Up To:** 70 GPM (return) 25 GPM (suction)
- Port Sizes:** 1 1/4" NPTF; 1 5/8"-12 UN(SAE-16)
- Pressure:** 200 PSI Max. Operating
- Temperature:** Up to + 200°F Operating
- Applications:** Petroleum based fluids
Consult factory for synthetic fluids

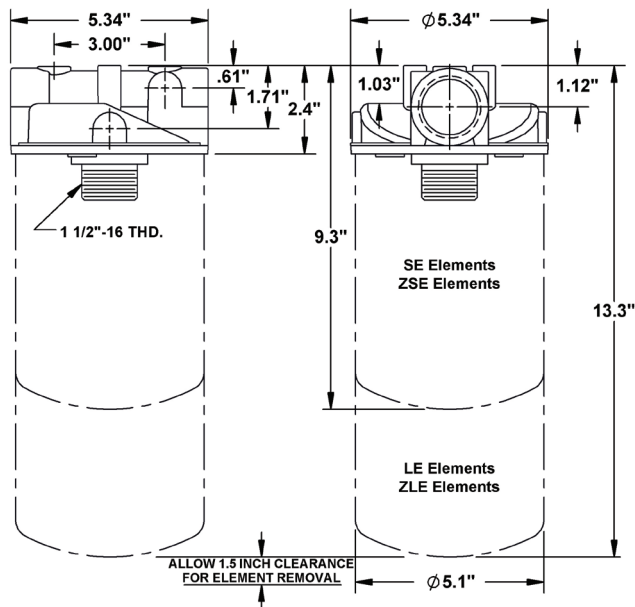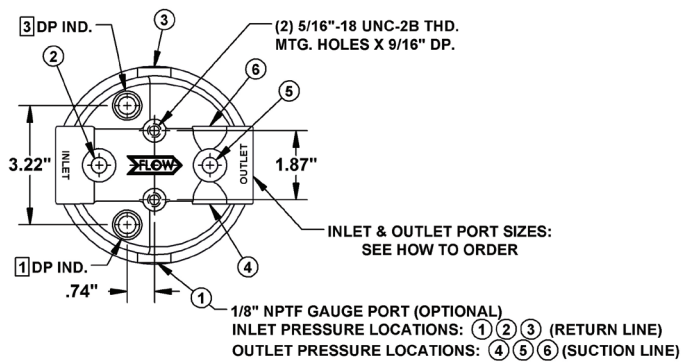

HOW TO ORDER: SF XXX XX X XXX XXX

Code	Inlet & Outlet Ports
122	1 1/4" NPTF
162	1 5/8"-12 UN(SAE-20)

Code	By-Pass Valve Setting
00	No By-Pass
25	25 PSI

Code	Gauge Port Location
00	No Port Required
13	1 & 3 (Return Line)
123456	1,2,3,4,5,6 (All)

Code	Pos. 1 & 3 Indicators
000	No Indicator
V22	Visual
D22	DC Electrical 1 Wire
H22	Vis./Elec. w/DIN Con.

