


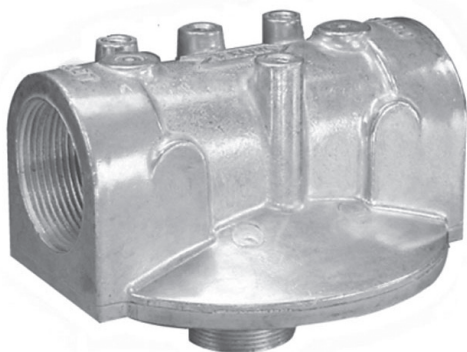


SF150 Series

Spin-On Filter Heads

Used with SE, LE, ZSE, & ZLE Filter Elements

- Flows Up To:** 80 GPM (return) 32 GPM (suction)
- Port Sizes:** 1 1/2" NPTF; 1 7/8"-12 UN(SAE-24)
- Pressure:** 200 PSI Max. Operating
- Temperature:** Up to + 250°F Operating
- Applications:** Petroleum based fluids
Consult factory for synthetic fluids

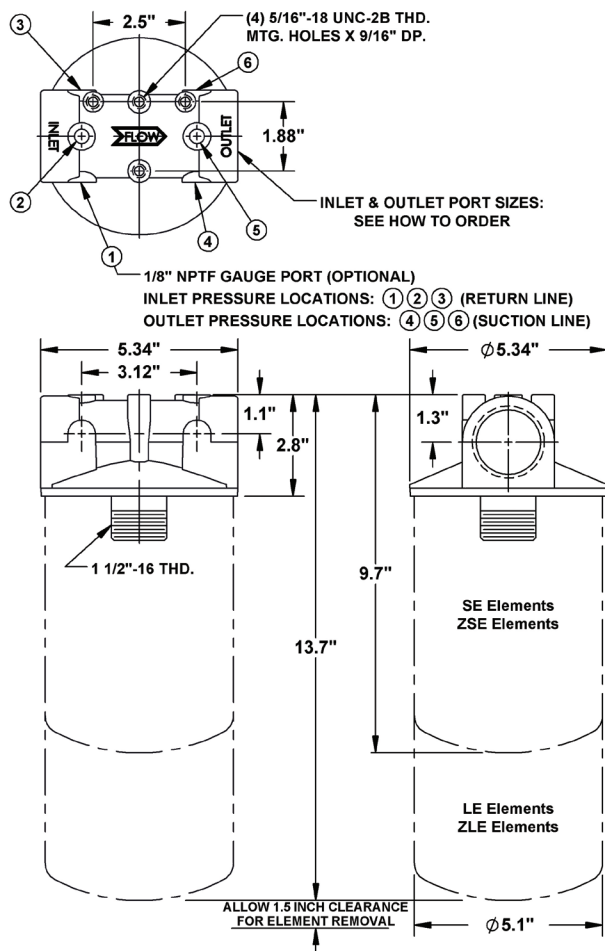

HOW TO ORDER: SF XXX XX X

Code	Inlet & Outlet Ports
150	1 1/2" NPTF
180	1 7/8" - 12 UN (SAE-24)

Code	By-Pass Valve Setting
00	No By-Pass
25	25 PSI

Code	Gauge Port Location
0	No Port Required
13	1 & 3 (Return Line)
123456	1,2,3,4,5,6 (All)

