




SG Series Reservoir Sight Level Gauges

- Temperature: 212°F Maximum
- Optional Thermometer
- Optional Guards
- UV Resistant Housing

For use with petroleum base and water base hydraulic fluids. Consult factory for other fluids.

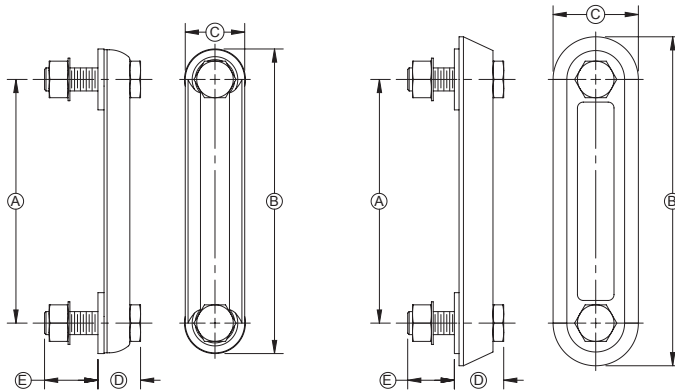

Model Number	A	B	C	D	E
SG03XX0	3"	4.22"	1.22"	0.81"	1.16"
SG03XXG	3"	4.75"	1.75"	0.93"	0.82"
SG05XX0	5"	6.22"	1.22"	0.81"	1.16"
SG05XXG	5"	6.75"	1.75"	0.93"	0.82"
SG05XXN	5"	6.75"	1.75"	0.93"	0.82"
SG10XX0	10"	11.22"	1.22"	0.81"	1.16"
SG10XXG	10"	11.75"	1.75"	0.93"	0.82"

HOW TO ORDER: SG XX X X X

Code	Bolt Center Distance
03	3"
05	5"
10	10"

Code	Bolt Type
A	1/2" - 13 UN
M	M12 X 1.75

Code	Thermometer
0	No Thermometer
T	With Thermometer

Code	Guard Material
0	No Guard
G	Aluminum
N	Glass Filled Nylon*
* Available on the 5" series only	



OE-1 Series OIL-EYE

- Fluid Level Oil Eye & Steel Weld Port
- For Use With Petroleum Base & Water Base Hydraulic Fluids
- Temperature: -65°F to 150°F for Non Pressurized Applications. (Max Temperture 212°F for Non Pressurized Applications)
- Sight Glass Designed for Use With SAE-8 Port Geometry

