



SME & ZSME Series


Filter Elements
Cellulose & Synthetic
Used With SMF Filter Housings

SME & ZSME Filter Elements			
Code	**Media Type**	**Nominal Rating**	**Absolute Rating**
SME03	Cellulose	β<4μ(c) = 2	β11μ(c) = 75
SME10	Cellulose	β5μ(c) = 2	β19μ(c) = 75
SME25	Cellulose	β19μ(c) = 2	β36μ(c) = 75
ZSME03	"Z-Glass"	β<4μ(c) = 2	β<4μ(c) = 200
ZSME10	"Z-Glass"	β<4μ(c) = 2	β10μ(c) = 200

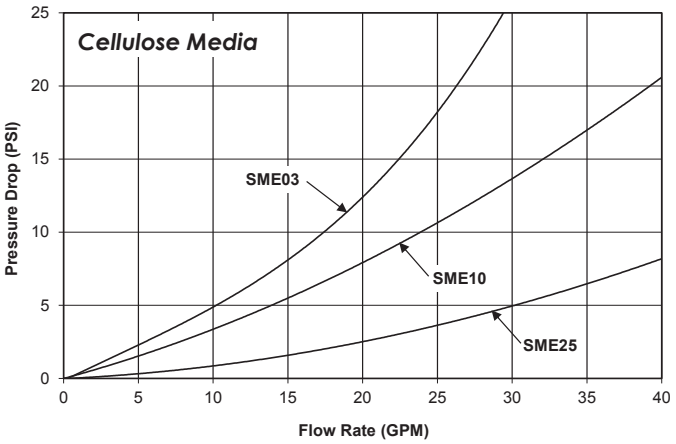

Average Pressure Drop Through Clean Filter Assembly With 150 SUS Oil At 105° F.

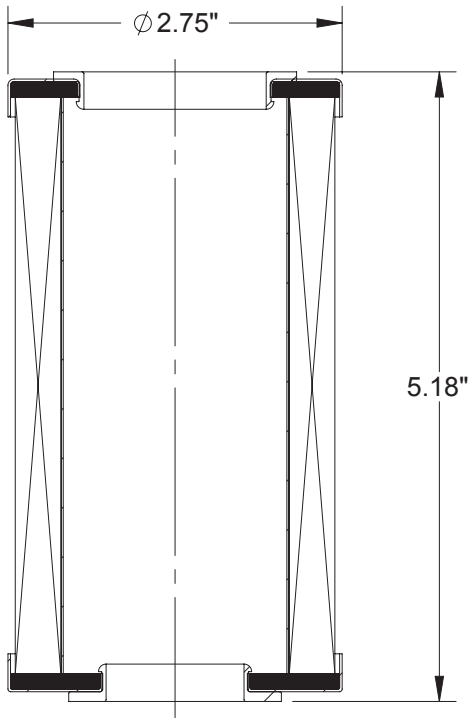

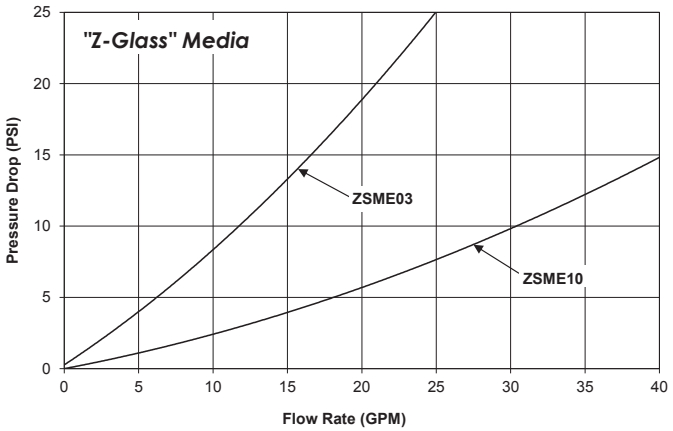

Average Pressure Drop Through Clean Filter Assembly With 150 SUS Oil At 105° F.

HOW TO ORDER: SMF XXX X

Code	Port Size
12S	1 1/16"-12UN (SAE-12)
16S	1 5/16"-12UN (SAE-16)

Code	Oil Fill Port Option
0	No Oil Fill Port
N	3/8" NPTF Fill Port w/ Plug

ZINGA Filtration Group®